

	Date:
	Client:
	Project:



5282ST

¾" thermostatic mixer.

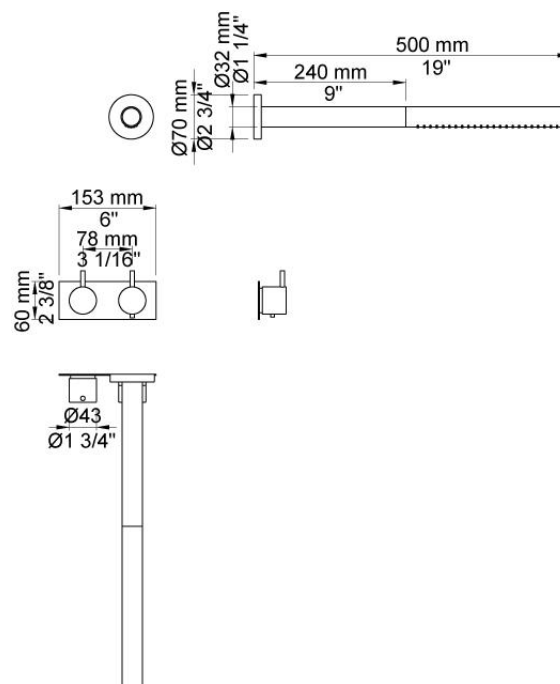
5282STUP = Thermostatic mixer 5200V, 200M.

5282STAP = Handle NR51, handle NR52, 500 mm head shower 080ST, two-hole plate 60 x 153 mm 5002.

Flow

	Bar:	1.0	2.0	3.0	4.0	5.0
5282ST ¹⁾	(l/min)	14.4	20.4	25.0	28.9	32.3


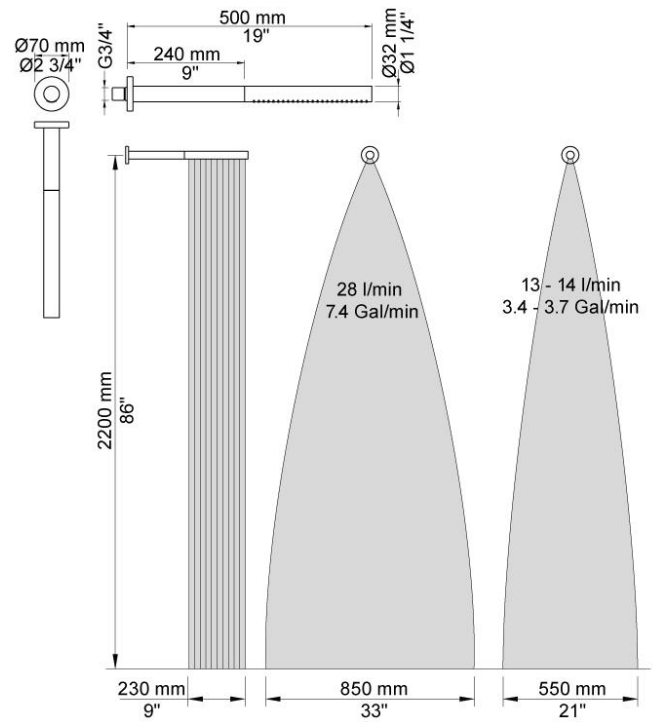
¹⁾ USA: Flow restricted to 1.8 gpm (7.0 l/min)

**Available in colors**

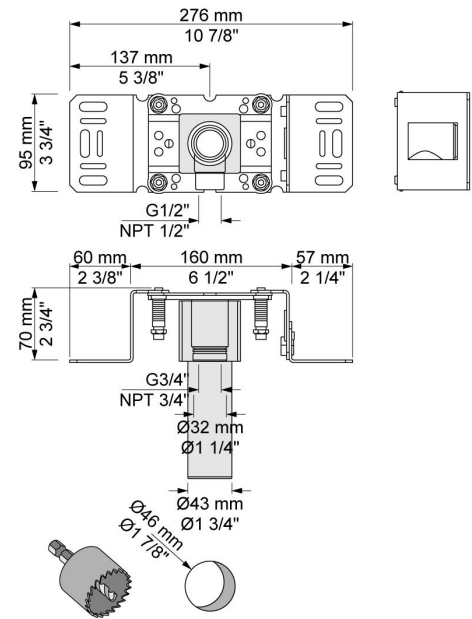
Color 02, Grey	Color 21, Carmine red
Color 04, Light blue	Color 25, Pink
Color 05, Orange	Color 27, Matt black
Color 06, Light green	Color 28, Matt white
Color 08, Yellow	Color 40, Brushed stainless steel
Color 09, Dark grey	Color 60, Black
Color 12, Mocca	Color 61, Brushed black
Color 14, Bright red	Color 62, Deep black
Color 15, Dark blue	Color 63, Copper
Color 16, Polished chrome	Color 64, Brushed Copper
Color 17, Gloss black	Color 65, Gold
Color 18, White	Color 68, Silver
Color 19, Natural brass	Color 70, Brushed Gold
Color 20, Brushed chrome	


**080ST**

Head shower, 500 mm.

**200M**

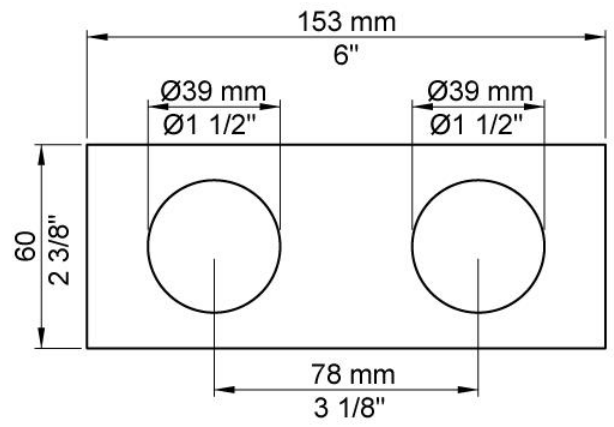
Separate outlet socket.
1/2" connection to copper, steel, iron or pex pipe work.





5002

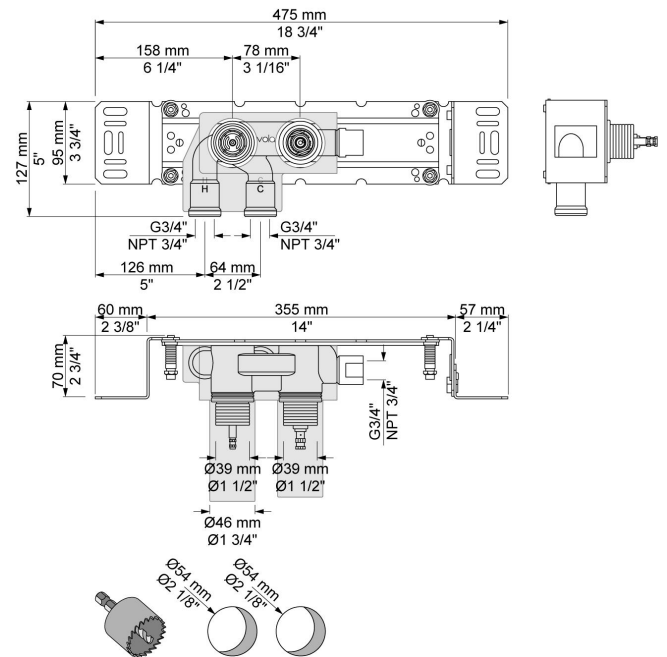
Two-hole plate 60 x 153 mm (for 5200 and 5200V).
Holes Ø39 and Ø39 mm.



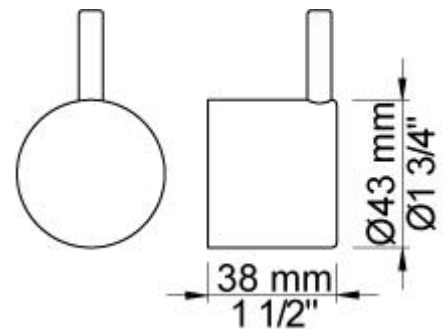
**5200V**

Thermostatic mixer without outlet socket.

3/4" connection to copper, steel, iron or pex pipe work.

**NR51**

On/off handle for series 5000.

**NR52**

Thermostatic handle for series 5000.

